

DECOY




DECOY UNCAGED 10

FRAME	Carbon Hybrid Frame	V4L 165 mm 148 x 12 mm DT Swiss Thru Axle UDH
FORK	FOX 38 Float Performance E-Opt.	29" 170 mm GRIP 15x110 mm 51 mm Offset
SHOCK	FOX DHX Performance	230 x 65 mm 2pos-Adjust Custom Tune
SPRING	FOX Steel Spring	400lbs (M-L) 450lbs (XL) 500lbs (XXL)
BATTERY	SMP YT CUSTOM	Removable 720 Wh 36 V 4A Charger
DRIVE UNIT	SHIMANO STEPS DU-EP801	85 Nm 250 W E-TUBE PROJECT APP
DISPLAY	SHIMANO STEPS SC-EM800	color 35 mm
SWITCH	SHIMANO STEPS SW-EM800-L	On-Bar
CASSETTE	SHIMANO SLX CS-M7100	10-51T 12-Speed Hyperglide+
DERAILLEUR	SHIMANO SLX RD-M7100	12-Speed Shadow+
SHIFT REAR	SHIMANO XT SL-M8100-R	12-Speed Rapidfire Plus 2-Way-Release
CRANKSET	SHIMANO FC-EM600	160 mm
CHAINRING	SHIMANO CRE70-12	36T DYNAMIC CHAIN ENGAGEMENT+
CHAINGUIDE	E13 e*SPEC Plus	2 Bolt 34-38T Compact Slider
WHEELSET	CRANKBROTHERS SYNTHESIS	29" 31,5 mm 110 x 15 mm 6-Bolt
	ALLOY E-MTB	27,5" 31,5 mm 148 x 12 mm 6-Bolt Microspline
TIRE FRONT	MAXXIS Assegai	29" x 2.5 WT 3C MaxxGrip EXO+ TR
TIRE REAR	MAXXIS Minion DHR II	27,5" x 2.6 WT 3C MaxxTerra EXO+ TR
HEADSET	ACROS AZX-260	Block Lock High Cap 2 Spacer 5 mm Flatcapset
STEM	RENTHAL AL6061	50 mm 0° Rise 6061 AL Black
HANDLEBAR	RENTHAL AL2014	800 mm 7° Back 5° Up 30 mm Rise 6061 AL Black
GRIPS	ODI ELITE MOTION V2.1	Lock-On
BRAKES	SRAM Code R	Rotor CENTERLINE 200 mm / 200 mm
SEATPOST	YT POSTMAN	Ø 31.6mm MMX-Remote
		150 mm (M) 170 mm (L-XL) 200 mm (XXL)
SADDLE	SDG BEL Air V3 Max	140 mm Lux-Alloy Rail YT Custom Design

COLOR: ASHEN GREY

SIZES: M,L,XL,XXL

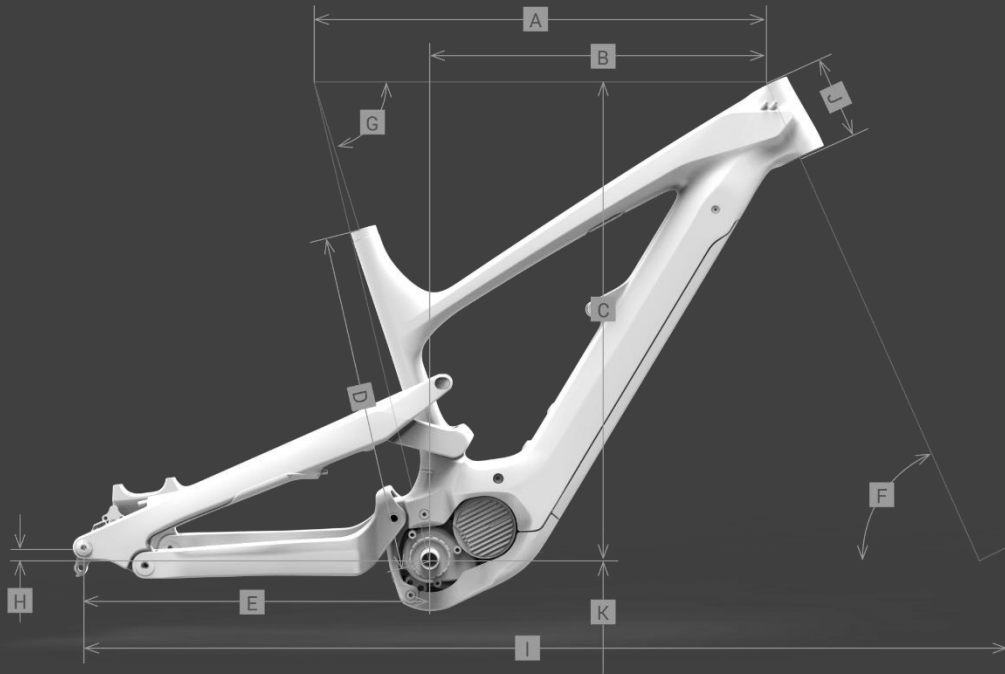

DECOY UNCAGED 10

		M	L	XL	XXL
A	toptube	591 mm	612 mm	635 mm	658 mm
B	reach	429 mm	449 mm	469 mm	489 mm
C	stack	629 mm	633 mm	643 mm	652 mm
D	seattube	420 mm	445 mm	470 mm	495 mm
E	chainstay	442 mm	442 mm	442 mm	442 mm
F	headtube angle	64,5 / 65 °	64,5 / 65 °	64,5 / 65 °	64,5 / 65 °
G	seattube angle (eff)	75,5 / 76 °	75,5 / 76 °	75,5 / 76 °	75,5 / 76 °
H	bb drop (low)	F32 R16 mm	F32 R16 mm	F32 R16 mm	F32 R16 mm
	bb drop (high)	F24 R8 mm	F24 R8 mm	F24 R8 mm	F24 R8 mm
I	wheelbase	1213 mm	1235 mm	1259 mm	1284 mm
J	headtube	100 mm	105 mm	115 mm	125 mm
K	bb height	344 / 352 mm	344 / 352 mm	344 / 352 mm	344 / 352 mm
	standover height	738 mm	724 mm	714 mm	702 mm